




**BELT DRIVEN SPINDLE REC-1**  
 ALL CRITICAL PARTS ARE HARDENED AND GROUND.  
 ALL SPINDLES ARE BALANCED.

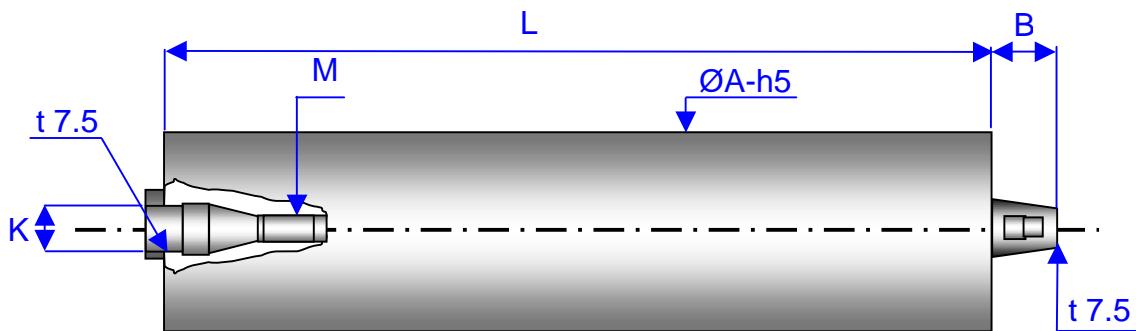

TYPE	ØA-H5	K	L	B	M	RPM
REC1040160	40	10	160	21	5	36,000
REC1040200	40	14	200	21	5	36,000
REC1040250	40	10	250	21	5	36,000
REC1050160	50	10	160	27	6	30,000
REC1050200	50	14	200	27	6	30,000
REC1050250	50	14	250	27	6	30,000
REC1060160	60	14	160	32	8	24,000
REC1060200	60	18	200	32	8	24,000
REC1060250	60	18	250	32	8	24,000
REC1060320	60	18	320	32	8	24,000
REC1060360	60	18	360	32	8	24,000
REC1070200	70	18	200	37	10	20,000
REC1070250	70	22	250	37	10	20,000
REC1070320	70	22	320	37	10	20,000
REC1080200	80	22	200	37	12	18,000
REC1080250	80	25	250	43	12	18,000
REC1080320	80	25	320	43	12	18,000
REC1080360	80	25	360	43	12	18,000
REC1090250	90	25	250	43	12	18,000
REC100250	100	25	250	65	16	12,000
REC100320	100	32	320	65	16	12,000
REC100360	100	32	360	65	16	12,000

ALL DIMENSIONS IN <MM>

Centerline, Inc.

2110 North Ash  
 Ponca City, OK 74601

Ph: (580) 762-5451  
 (800) 696-2865  
 Fax: (580) 762-4722

Email: info@centerline-inc.com  
 Website: www.centerline-inc.com