




EVERYTHING SPINDLE

BELT DRIVEN SPINDLE WITH ISO TAPER- TYPE BL/ISO
 ALL CRITICAL PARTS ARE HARDENED AND GROUND.
 ALL SPINDLES ARE BALANCED.

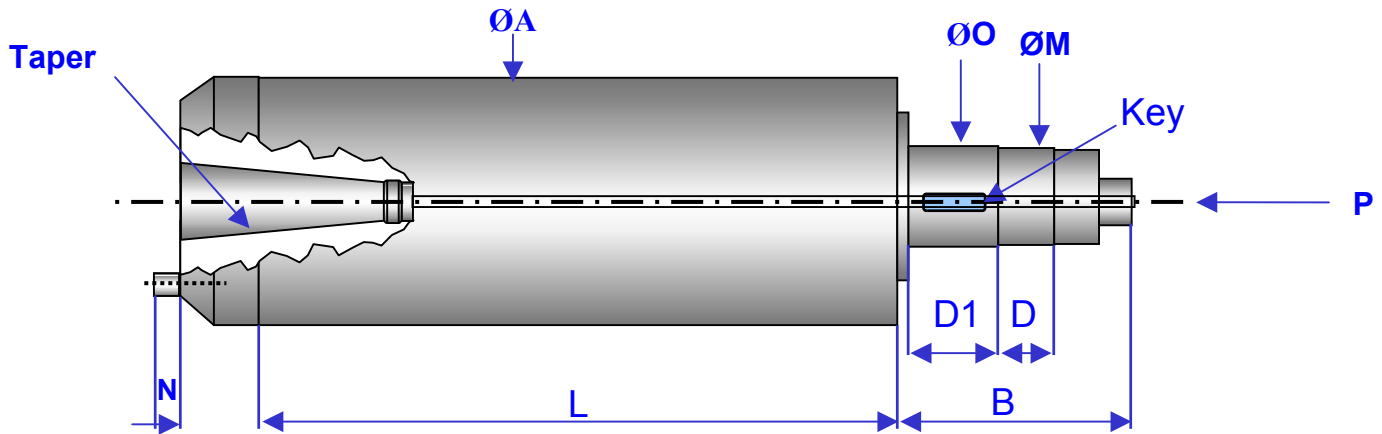

CEN Type	TAPER	A	O	M	N	L	B	D	D1	KEY	P=dN	RPM
CEN BL60X127/16000/ISO25	ISO25	60	28	28x1	7	138	87	22	48	6x30	110	16,000
CEN BL60X162/16000/ISO25	ISO25	60	28	28x1	7	168	72	16	51	6x25	90	16,000
CEN BL60X187/16000/ISO25	ISO25	60	25	28x1	7	201	87	22	48	6x30	110	16,000
CEN BL70X136/16000/ISO25	ISO25	70	27	27x1	7	150	70	17	10	6x10	180	16,000
CEN BL70X154/16000/ISO25	ISO25	70	35	35x1	7	169	114	20	84	6x30	300	16,000
CEN BL70X184/16000/ISO25	ISO25	70	35	34x1	7	199	94	20	65	6x30	310	16,000
CEN BL75X154/14000/ISO25	ISO25	75	35	34x1.5	7	169	114	20	84	6x30	300	14,000
CEN BL75X184/14000/ISO25	ISO25	75	35	34x1.5	8	199	94	20	65	6x30	300	14,000
CEN BL80X198/14000/ISO30	ISO30	80	35	34x1.5	8	194	78	20	48	6x30	300	14,000
CEN BL135X332/8500/ISO40	ISO40	135	55	55x1.5	8	332	176	24	70	16x70	1200	8,500
CEN BL130X460/7800/ISO50	ISO50	130	70	70x1.5	8	440	139	22	50	20x50	2200	7,800

- ❖ ALL DIMENSIONS IN <MM>
- ❖ GREASE LUBRICATED

www.centerline-inc.com

2110 North Ash - Ponca City, OK 74601

Phone: 580-762-5451 Toll Free: 1-800-696-2865 Fax: 580-762-4722 Email: info@centerline-inc.com