


## BELT DRIVEN SPINDLE WITH OD TAPER – TYPE BL/ODT

ALL CRITICAL PARTS ARE HARDENED AND GROUND.  
ALL SPINDLES ARE BALANCED.  
OD-TAPER PER REQUEST.

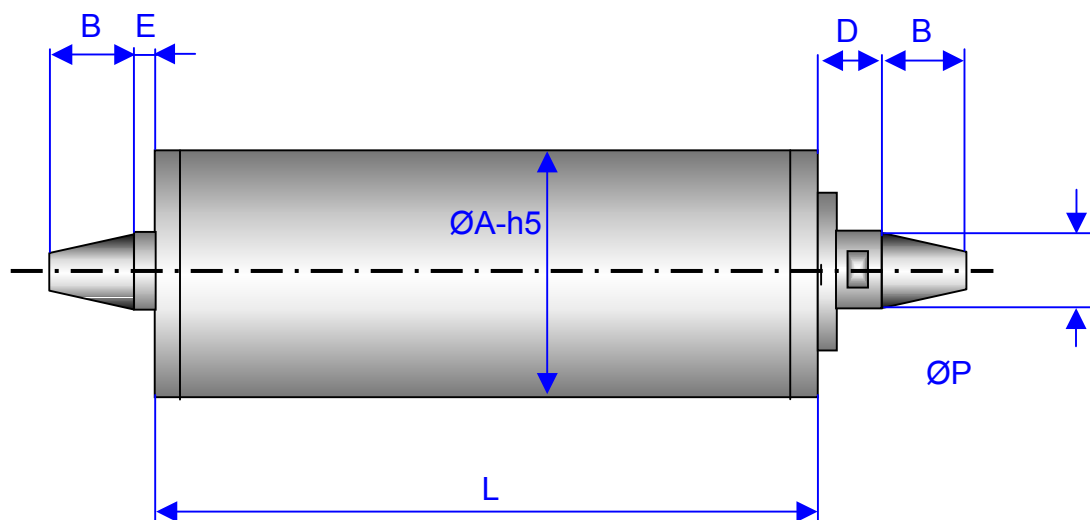

CEN Type	A	L	D	E	B	P	Taper	RPM
BL 40X140/15000/ODT	40	140	6	1	19	12	1:5	15,000
BL 40X180/15000/ODT	40	180	6	1	19	12	1:5	15,000
BL 50X153/20000/ODT	50	153	7	1	22	14	1:5	20,000
BL 50X200/20000/ODT	50	200	8	2	22	14	1:5	20,000
BL 50X350/19000/ODT	50	350	8	2	22	14	1:5	19,000
BL 50X400/18000/ODT	50	400	8	2	22	14	1:5	18,000
BL 60X180/18000/ODT	60	180	9	3	25	18	1:7.5	18,000
BL 60X240/18000/ODT	60	240	9	3	25	18	1:7.5	18,000
BL 70X150/18000/ODT	70	150	7	1	22	14	1:5	18,000
BL 70X235/17000/ODT	70	235	5	12.5	25	23	1:5	17,000
BL 80X350/17000/ODT	80	350	10	2	44	28.5	1:5	17,000
BL 80X400/17000/ODT	80	400	10	2	44	28.5	1:5	17,000
BL 100X350/14000/ODT	100	350	15	4	52.5	30	1:7.5	14,000

- ❖ ALL DIMENSIONS IN <MM>
- ❖ GREASE LUBRICATED

[www.centerline-inc.com](http://www.centerline-inc.com)