


BELT DRIVEN SPINDLE WITH ID TAPER - TYPE BL/IDT

ALL CRITICAL PARTS ARE HARDENED AND GROUND.
ALL SPINDLES ARE BALANCED.

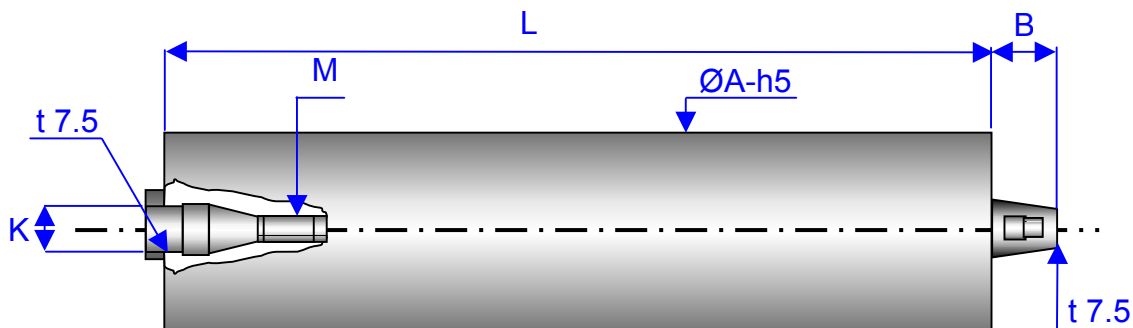

CEN Type	ØA-H5	K	L	B	M	RPM
BL 40X160/36000/IDT	40	10	160	21	5	36,000
BL 40X200/36000/IDT	40	14	200	21	5	36,000
BL 40X250/36000/IDT	40	10	250	21	5	36,000
BL 50X160/30000/IDT	50	10	160	27	6	30,000
BL 50X200/30000/IDT	50	14	200	27	6	30,000
BL 50X250/30000/IDT	50	14	250	27	6	30,000
BL 60X160/24000/IDT	60	14	160	32	8	24,000
BL 60X200/24000/IDT	60	18	200	32	8	24,000
BL 60X250/24000/IDT	60	18	250	32	8	24,000
BL 60X320/24000/IDT	60	18	320	32	8	24,000
BL 60X360/24000/IDT	60	18	360	32	8	24,000
BL 70X200/20000/IDT	70	18	200	37	10	20,000
BL 70X250/20000/IDT	70	22	250	37	10	20,000
BL 70X320/20000/IDT	70	22	320	37	10	20,000
BL 80X200/18000/IDT	80	22	200	37	12	18,000
BL 80X250/18000/IDT	80	25	250	43	12	18,000
BL 80X320/18000/IDT	80	25	320	43	12	18,000
BL 80X360/18000/IDT	80	25	360	43	12	18,000
BL 90X250/18000/IDT	90	25	250	43	12	18,000
BL 100X250/12000/IDT	100	25	250	64.5	16	12,000
BL 100X320/12000/IDT	100	32	320	64.5	16	12,000
BL 100X360/12000/IDT	100	32	360	64.5	16	12,000

- ❖ ALL DIMENSIONS IN <MM>
- ❖ GREASE LUBRICATED

www.centerline-inc.com

2110 North Ash - Ponca City, OK 74601

Phone: 580-762-5451 Toll Free: 1-800-696-2865 Fax: 580-762-4722 Email: info@centerline-inc.com